

# NEOLIN



## HP, UHP, WINTER, VAN

12-20 RIM SIZE

164 SIZES



EU TYRE LABELLING

**PERFORMANCE  
ALL SEASONS  
CONFORTABLE  
QUITE RIDE  
SAFETY  
COST-EFFECTIVE**



# STARIDGE

> Neotour



> Neogreen



> Neogreen+



> NeoSport



> NeoWinter






> Neolan Van



NEOLIN

WHEELING IN WORLD, WALKING IN LIFE

## LABELLING LEVEL

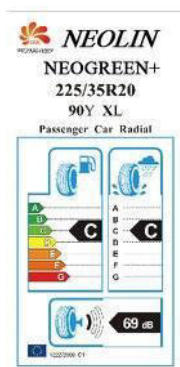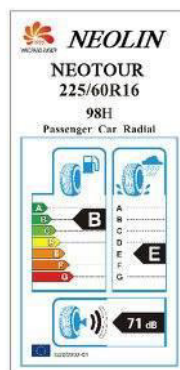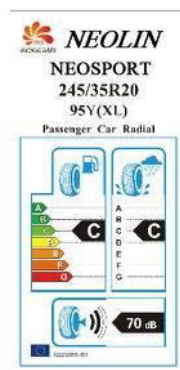

## CERTIFICATION





# NEOTOUR >>



WHEELING IN WORLD, WALKING IN LIFE

## Performance Advantages

1

Enhanced 4 grooves, evacuates water rapidly, provides extra grip on wet pavement.

2

Extra tread depth and durable compound formula improves durability by 15% compared to 4S/4S+

3

Optimized tread block design improves wet performance

4

Variable shoulder blocks provides a quieter and more comfortable ride.



| Size        | Load Index | Speed Rating | UTQG   | M+S | Standard Rim | Section Width | Overall Diameter | Max Load | Max Pressure | Tread Depth |
|-------------|------------|--------------|--------|-----|--------------|---------------|------------------|----------|--------------|-------------|
|             |            |              |        |     |              | mm            | mm               | kg       | psi          | kPa         |
| 16S/65R13   | 77         | T            | 500 AA | M+S | 5.0          | 170           | 544              | 412      | 350          | 8.2         |
| 16S/70R13   | 79         | T            | 500 AA | M+S | 5.0          | 170           | 562              | 437      | 350          | 8.2         |
| 17S/65R14   | 82         | H            | 500 AA | M+S | 5.0          | 177           | 584              | 475      | 350          | 8.7         |
| 17S/70R13   | 82         | T            | 500 AA | M+S | 5.0          | 177           | 576              | 475      | 350          | 8.7         |
| 17S/70R14   | 84         | T            | 500 AA | M+S | 5.0          | 177           | 602              | 500      | 350          | 8.7         |
| 18S/60R14   | 82         | H            | 500 AA | M+S | 5.5          | 189           | 578              | 475      | 350          | 8.7         |
| 18S/60R15   | 84         | H            | 500 AA | M+S | 5.5          | 189           | 603              | 500      | 350          | 8.7         |
| 18S/65R14   | 86         | H            | 500 AA | M+S | 5.5          | 189           | 596              | 530      | 350          | 8.7         |
| 18S/70R14   | 88         | T            | 500 AA | M+S | 5.5          | 189           | 616              | 560      | 350          | 8.7         |
| 19S/60R14   | 86         | H            | 500 AA | M+S | 6.0          | 201           | 590              | 530      | 350          | 8.7         |
| 19S/60R15   | 88         | H            | 500 AA | M+S | 6.0          | 201           | 615              | 560      | 350          | 8.7         |
| 19S/65R15   | 91         | H            | 500 AA | M+S | 6.0          | 201           | 635              | 615      | 350          | 8.7         |
| 19S/70R14   | 91         | T            | 500 AA | M+S | 6.0          | 201           | 630              | 615      | 350          | 8.7         |
| 20S/65R16   | 91         | V            | 500 AA | M+S | 6.5          | 214           | 632              | 615      | 350          | 8.7         |
| 20S/60R18   | 92         | V            | 500 AA | M+S | 6.0          | 209           | 652              | 630      | 350          | 8.7         |
| 20S/65R15XL | 99         | T            | 500 AA | M+S | 6.0          | 209           | 647              | 775      | 340          | 8.7         |
| 20S/70R15   | 96         | T            | 500 AA | M+S | 6.0          | 209           | 669              | 710      | 350          | 8.7         |
| 21S/50R17XL | 95         | V            | 500 AA | M+S | 7.0          | 225           | 848              | 890      | 340          | 8.7         |
| 21S/60R16   | 95         | V            | 500 AA | M+S | 6.5          | 221           | 664              | 690      | 350          | 8.7         |
| 21S/65R16   | 98         | H            | 500 AA | M+S | 6.5          | 221           | 686              | 750      | 350          | 8.7         |
| 21S/70R15   | 98         | T            | 500 AA | M+S | 6.5          | 221           | 683              | 750      | 350          | 8.7         |
| 22S/60R17   | 94         | V            | 500 AA | M+S | 7.0          | 233           | 658              | 670      | 350          | 8.7         |
| 22S/60R16   | 98         | H            | 500 AA | M+S | 6.5          | 228           | 676              | 750      | 350          | 8.7         |
| 22S/65R17   | 102        | H            | 500 AA | M+S | 6.5          | 228           | 724              | 850      | 350          | 8.7         |
| 23S/65R18   | 100        | V            | 500 AA | M+S | 7.5          | 245           | 715              | 800      | 350          | 8.7         |

## Applicable Models

Car, Taxi



## Applicable Roads

Freeway, City Highway, Rural Roads



## Pattern Characteristics





# NEOGREEN >>

## Performance Advantages

1

Enhanced 3 grooves, evacuates water rapidly, provides extra safety on wet pavement.

2

Asymmetric tread design, improves handling at cornering, suitable for all seasons.

3

Special "S" steel disc design effectively breaks water film and enhances wet traction performance.

4

New silicon compound, improves grip, reduces rolling resistance.



| Size        | Load Index | Speed Rating | UTQG   | M+S | Standard Rim | Section Width | Overall Diameter | Max Load | Max Pressure |     | Tread Depth |
|-------------|------------|--------------|--------|-----|--------------|---------------|------------------|----------|--------------|-----|-------------|
|             |            |              |        |     |              | mm            | mm               | kg       | psi          | kPa |             |
| 145/70R12   | 69         | T            | 400 AA | M+S | 4.5          | 150           | 509              | 325      | 350          | 350 | 7.2         |
| 155/55R14   | 69         | H            | 400 AA | M+S | 5.0          | 162           | 526              | 325      | 350          | 350 | 7.2         |
| 165/40R16XL | 70         | V            | 400 AA | M+S | 6.0          | 170           | 538              | 335      | 340          | 340 | 7.2         |
| 165/40R16XL | 73         | V            | 400 AA | M+S | 6.0          | 170           | 538              | 365      | 340          | 340 | 7.2         |
| 165/45R16XL | 74         | V            | 400 AA | M+S | 5.5          | 165           | 554              | 375      | 350          | 350 | 7.2         |
| 165/50R15   | 72         | VH           | 400 AA | M+S | 5.0          | 170           | 547              | 355      | 350          | 350 | 7.4         |
| 165/55R14   | 72         | H            | 400 AA | M+S | 5.0          | 170           | 538              | 355      | 350          | 350 | 7.4         |
| 165/55R15   | 75         | VH           | 400 AA | M+S | 5.0          | 170           | 563              | 387      | 350          | 350 | 7.2         |
| 165/60R14   | 75         | H            | 400 AA | M+S | 5.0          | 170           | 554              | 387      | 350          | 350 | 7.4         |
| 165/70R13   | 79         | T            | 400 AA | M+S | 5.0          | 170           | 562              | 437      | 350          | 350 | 7.4         |
| 165/70R14   | 81         | T            | 400 AA | M+S | 5.0          | 170           | 588              | 462      | 350          | 350 | 7.4         |
| 175/65R14   | 82         | H/T          | 400 AA | M+S | 5.0          | 177           | 584              | 475      | 350          | 350 | 7.4         |
| 175/65R15   | 84         | H            | 400 AA | M+S | 5.0          | 177           | 609              | 500      | 350          | 350 | 7.4         |
| 175/70R13   | 82         | T            | 400 AA | M+S | 5.0          | 177           | 576              | 475      | 350          | 350 | 7.4         |
| 175/70R14   | 84         | T            | 400 AA | M+S | 5.0          | 177           | 602              | 500      | 350          | 350 | 7.4         |
| 185/55R15   | 82         | V            | 400 AA | M+S | 6.0          | 194           | 585              | 475      | 350          | 350 | 7.4         |
| 185/60R14   | 82         | H            | 400 AA | M+S | 5.5          | 189           | 578              | 475      | 350          | 350 | 7.4         |
| 185/60R15   | 84         | H            | 400 AA | M+S | 5.5          | 189           | 603              | 500      | 350          | 350 | 7.4         |
| 185/65R14   | 86         | H            | 400 AA | M+S | 5.5          | 189           | 596              | 530      | 350          | 350 | 7.4         |
| 185/65R14XL | 90         | S            | 400 AA | M+S | 5.5          | 189           | 596              | 600      | 340          | 340 | 7.4         |
| 185/65R15   | 88         | H            | 400 AA | M+S | 5.5          | 189           | 621              | 560      | 350          | 350 | 7.4         |
| 185/70R13   | 86         | T            | 400 AA | M+S | 5.5          | 189           | 590              | 530      | 350          | 350 | 7.4         |
| 185/70R14   | 88         | T            | 400 AA | M+S | 5.5          | 189           | 616              | 560      | 350          | 350 | 7.4         |

## Applicable Models

Car



## Applicable Roads

Freeway, City Highway, Rural Roads



## Pattern Characteristics





# NEOGREEN+ >>



## Performance Advantages

1

Enhanced 4 grooves, evacuates water rapidly, provides extra grip on wet pavement.

2

Asymmetric tread design, improves handling at cornering, suitable for all seasons.

3

Special "S" steel disc design effectively breaks water film and enhances wet traction performance.

4

New silicon compound, improves grip, reduces rolling resistance.



WHEELING IN WORLD, WALKING IN LIFE

| Size        | Load Index | Speed Rating | UTQG   | M+S | Standard Rim | Section Width | Overall Diameter | Max Load | Max Pressure |     | Tread Depth |
|-------------|------------|--------------|--------|-----|--------------|---------------|------------------|----------|--------------|-----|-------------|
|             |            |              |        |     |              | mm            | mm               | kg       | psi          | kPa | mm          |
| 195/60R15   | 82         | V            | 400 AA | M+S | 6.0          | 201           | 577              | 475      | 350          |     | 7.8         |
| 195/55R15   | 85         | V            | 400 AA | M+S | 6.0          | 201           | 595              | 515      | 350          |     | 7.8         |
| 195/55R16XL | 91         | V            | 400 AA | M+S | 6.0          | 201           | 620              | 615      | 340          |     | 7.8         |
| 195/60R15   | 88         | VH           | 400 AA | M+S | 6.0          | 201           | 615              | 560      | 350          |     | 7.8         |
| 195/65R15   | 91         | VH           | 400 AA | M+S | 6.0          | 201           | 635              | 615      | 350          |     | 7.8         |
| 195/70R14   | 91         | T            | 400 AA | M+S | 6.0          | 201           | 630              | 615      | 350          |     | 7.8         |
| 205/40R17XL | 84         | W            | 400 AA | M+S | 7.5          | 212           | 596              | 600      | 340          |     | 7.8         |
| 205/45R16   | 83         | V            | 400 AA | M+S | 7.0          | 206           | 590              | 487      | 350          |     | 7.8         |
| 205/50R16   | 87         | V            | 400 AA | M+S | 6.5          | 214           | 612              | 545      | 350          |     | 7.8         |
| 205/55R16   | 91         | VH           | 400 AA | M+S | 6.5          | 214           | 632              | 615      | 350          |     | 7.8         |
| 205/60R14   | 88         | V            | 400 AA | M+S | 6.0          | 209           | 602              | 560      | 350          |     | 7.8         |
| 205/60R15   | 91         | V            | 400 AA | M+S | 6.0          | 209           | 627              | 615      | 350          |     | 7.8         |
| 205/60R16   | 92         | H            | 400 AA | M+S | 6.0          | 209           | 652              | 630      | 350          |     | 7.8         |
| 205/65R15   | 94         | VH           | 400 AA | M+S | 6.0          | 209           | 647              | 670      | 350          |     | 7.8         |
| 215/60R16   | 95         | V            | 400 AA | M+S | 6.5          | 221           | 664              | 690      | 350          |     | 7.8         |
| 225/60R16   | 98         | H            | 400 AA | M+S | 6.5          | 228           | 676              | 750      | 350          |     | 7.8         |



## Applicable Models

Car



## Applicable Roads

Freeway, City Highway, Rural Roads



## Pattern Characteristics



New Material



Grip



Low Consumption



Low Noise



Comfort



# NEOSPORT



WHEELING IN WORLD, WALKING IN LIFE

## Performance Advantages

1

Heat resistant compound produces less heat on the road; enhanced structural design gives tire extra strength during an impact



2

Asymmetric tread design improves the handling ability of the tire, suitable for all season use.

3

Enhanced side wall design gives the tire 100km mileage at 0 PSI



4

Wide bead design allows the tire to be attached on the rim at 0 PSI



| Size         | Load Index | Speed Rating | UTQG    | M+S | Standard Rim | Section Width | Overall Diameter | Max Load | Max Pressure | Tread Depth |    |
|--------------|------------|--------------|---------|-----|--------------|---------------|------------------|----------|--------------|-------------|----|
|              |            |              |         |     |              | mm            | mm               | kg       | psi          | kPa         | mm |
| 205/55R16    | 91         | W            | 500 A A | M+S | 6.50         | 214           | 632              | 615      | 51           | 350         | 8  |
| 225/45R17 XL | 94         | W            | 500 A A | M+S | 7.50         | 225           | 634              | 670      | 50           | 340         | 8  |
| 225/45R18 XL | 95         | W            | 500 A A | M+S | 7.50         | 225           | 659              | 690      | 50           | 340         | 8  |
| 225/50R17 XL | 98         | W            | 500 A A | M+S | 7.00         | 233           | 658              | 750      | 50           | 340         | 8  |
| 225/55R17 XL | 101        | W            | 500 A A | M+S | 7.00         | 233           | 680              | 825      | 50           | 340         | 8  |
| 245/45R18 XL | 100        | W            | 500 A A | M+S | 8.00         | 243           | 677              | 800      | 50           | 340         | 8  |
| 245/50R18 XL | 104        | W            | 500 A A | M+S | 7.50         | 253           | 703              | 900      | 50           | 340         | 8  |
| 255/50R19 XL | 107        | W            | 500 A A | M+S | 8.00         | 265           | 739              | 875      | 50           | 340         | 8  |
| 255/55R18 XL | 109        | W            | 500 A A | M+S | 8.00         | 265           | 737              | 1030     | 50           | 340         | 8  |

## Applicable Models

Advanced Car



## Applicable Roads

Freeway, City Highway



## Pattern Characteristics



New Material



Grip



Security



Low Noise



Easy Manipulation



# NEOWINTER >>



WHEELING IN WORLD, WALKING IN LIFE

## Performance Advantages

1

"Y" shaped single-oriented pattern design, with excellent drainage, snow discharging and anti slippery capacity, improves snow road performance.

2

Zigzag block design, improves traction on ice and snow pavement.

3

3D steel design can heighten operating performance.

4

Special tread compound, ensures safety in winter.



| Size        | Load Index | Speed Rating | M+S | Standard Rim | Section Width | Overall Diameter | Max Load | Max Pressure | Tread Depth |
|-------------|------------|--------------|-----|--------------|---------------|------------------|----------|--------------|-------------|
|             |            |              |     |              | mm            | mm               | kg       | kPa          | mm          |
| 165/70R14   | 81         | T            | M+S | 5.0          | 170           | 588              | 462      | 350          | 8.4         |
| 175/65R14   | 82         | T            | M+S | 5.0          | 177           | 584              | 475      | 350          | 8.4         |
| 175/70R13   | 82         | T            | M+S | 5.0          | 177           | 576              | 475      | 350          | 8.4         |
| 175/70R14   | 84         | T            | M+S | 5.0          | 177           | 602              | 500      | 350          | 8.4         |
| 185/60R14   | 82         | H            | M+S | 5.5          | 189           | 578              | 475      | 350          | 8.4         |
| 185/60R15   | 84         | H            | M+S | 5.5          | 189           | 603              | 500      | 350          | 8.4         |
| 185/65R14   | 86         | H            | M+S | 5.5          | 189           | 596              | 530      | 350          | 8.4         |
| 185/65R15   | 88         | H            | M+S | 5.5          | 189           | 621              | 560      | 350          | 8.4         |
| 195/55R15   | 85         | H            | M+S | 6.0          | 201           | 595              | 515      | 350          | 8.8         |
| 195/55R16XL | 91         | H            | M+S | 6.0          | 201           | 620              | 615      | 340          | 8.8         |
| 195/60R15   | 88         | H            | M+S | 6.0          | 201           | 615              | 560      | 350          | 8.8         |
| 195/65R15   | 91         | H            | M+S | 6.0          | 201           | 635              | 615      | 350          | 8.8         |
| 205/55R16   | 91         | V            | M+S | 6.5          | 214           | 632              | 615      | 350          | 8.8         |
| 205/60R16   | 92         | H            | M+S | 6.0          | 209           | 652              | 630      | 350          | 8.8         |
| 205/65R15   | 94         | H            | M+S | 6.0          | 209           | 647              | 670      | 350          | 8.8         |
| 215/55R16XL | 97         | V            | M+S | 7.0          | 226           | 642              | 730      | 340          | 8.8         |
| 215/60R16   | 95         | V/H          | M+S | 6.5          | 221           | 664              | 690      | 350          | 8.8         |
| 215/65R16   | 98         | H            | M+S | 6.5          | 221           | 686              | 750      | 350          | 8.8         |
| 225/40R16XL | 92         | V            | M+S | 8.0          | 230           | 637              | 630      | 340          | 8.8         |
| 225/45R17XL | 94         | V            | M+S | 7.5          | 225           | 634              | 670      | 340          | 8.8         |
| 225/55R16XL | 99         | H            | M+S | 7.0          | 233           | 654              | 775      | 340          | 8.8         |
| 225/55R17   | 97         | H            | M+S | 7.0          | 233           | 680              | 730      | 350          | 8.8         |

## Applicable Models

Car

## Applicable Roads

Snow, Ice

## Pattern Characteristics



New Material



Grip



Security



Easy Manipulation



# NEOLAND VAN



WHEELING IN WORLD, WALKING IN LIFE

## Performance Advantages

1

Enhanced 3 grooves, evacuates water rapidly, and provides extra safety on wet pavement.

2

Penetrating steel design can break the water film on slippery roads to increase the grip.

3

Advanced durable compound design with four large pattern ribs imparts superior wear resistance.

4

Reinforced belt steel wire layer design improves tire handling performance and puncture resistance.



| Size       | Load Index | Speed Rating | UTQG    | M+S | Standard Rim | Section Width | Overall Diameter | Max Load  | Max Pressure | Tread Depth |
|------------|------------|--------------|---------|-----|--------------|---------------|------------------|-----------|--------------|-------------|
|            |            |              |         |     |              | mm            | mm               | kg        | psi          | kPa         |
| 155R12C    | 88/86      | Q            | BSW     | M+S | 4.5          | 157           | 550              | 560/530   | 450          | 9.7         |
| 155R13C    | 85/83      | Q            | BSW     | M+S | 4.5          | 157           | 578              | 515/487   | 350          | 9.7         |
| 165R13C    | 91/89      | Q            | BSW     | M+S | 4.5          | 167           | 596              | 615/580   | 375          | 9.7         |
| 185R14C    | 102/100    | Q            | BSW/CWL | M+S | 5.5          | 188           | 650              | 850/800   | 450          | 9.7         |
| 195R14C    | 100/104    | Q            | BSW/CWL | M+S | 5.5          | 198           | 666              | 950/900   | 450          | 9.7         |
| 195R15C    | 100/104    | Q            | BSW/CWL | M+S | 5.5          | 198           | 693              | 950/900   | 450          | 9.7         |
| 205R14C    | 109/107    | Q            | BSW/CWL | M+S | 6            | 208           | 696              | 1030/975  | 450          | 9.7         |
| 205R16C    | 110/108    | R            | BSW/CWL | M+S | 6            | 208           | 736              | 1060/1000 | 450          | 9.7         |
| 165/70R13C | 88/86      | R            | BSW     | M+S | 5            | 170           | 562              | 560/530   | 375          | 9.7         |
| 165/70R14C | 89/87      | R/T          | BSW     | M+S | 5            | 170           | 588              | 580/545   | 375          | 9.7         |
| 175/70R14C | 95/93      | R            | BSW     | M+S | 5            | 177           | 602              | 690/650   | 375          | 9.7         |
| 185/75R16C | 104/102    | R            | BSW     | M+S | 5            | 184           | 684              | 900/850   | 475          | 9.7         |
| 165/70R15C | 104/102    | R            | BSW     | M+S | 6            | 201           | 655              | 900/850   | 450          | 9.7         |
| 165/75R16C | 107/105    | R            | BSW     | M+S | 5.5          | 196           | 698              | 975/925   | 475          | 9.7         |
| 205/65R16C | 107/105    | T            | BSW     | M+S | 6            | 209           | 672              | 975/925   | 475          | 9.7         |
| 205/70R15C | 109/104    | R            | BSW     | M+S | 6            | 209           | 669              | 950/900   | 450          | 9.7         |
| 205/75R16C | 110/108    | R            | BSW     | M+S | 5.5          | 203           | 714              | 1060/1000 | 475          | 9.7         |
| 215/60R16C | 103/101    | T            | BSW     | M+S | 6.5          | 221           | 664              | 875/825   | 375          | 9.7         |
| 215/65R16C | 109/107    | R            | BSW     | M+S | 6.5          | 221           | 686              | 1030/975  | 475          | 9.7         |
| 215/70R15C | 109/107    | R            | BSW     | M+S | 6.5          | 221           | 683              | 1030/975  | 450          | 9.7         |
| 215/75R16C | 113/111    | R            | BSW     | M+S | 6            | 216           | 728              | 1150/1050 | 475          | 9.7         |
| 225/65R16C | 112/110    | R            | BSW     | M+S | 6.5          | 228           | 698              | 1120/1060 | 475          | 9.7         |
| 225/70R15C | 112/110    | R            | BSW     | M+S | 6.5          | 228           | 697              | 1120/1060 | 450          | 9.7         |
| 235/65R16C | 115/113    | R            | BSW     | M+S | 7            | 240           | 712              | 1215/1150 | 475          | 9.7         |

## Applicable Models

Light Trucks, Pickup



## Applicable Roads

Freeway, City Highway, Rural Roads



## Pattern Characteristics



Load Resistance



Grip



Long Mileage



Low Noise



Easy Manipulation