


Product Data

SYNTH - PRO 5W30

FULLY SYNTHETIC "LOW SAPS" LONGLIFE III MOTOROIL OF THE LATEST GENERATION.

This is a full synthetic lubricant based on carefully selected very high quality base oils. It is specifically formulated to meet the most demanding VW specifications available today - VW 504.00 and 507.00 - as well as the Long Life III requirements of the VAG Group. It is a Mid SAPS oil which meets Euro 4 and Euro 5 norms and provides protection to the Diesel Particulate Filter.

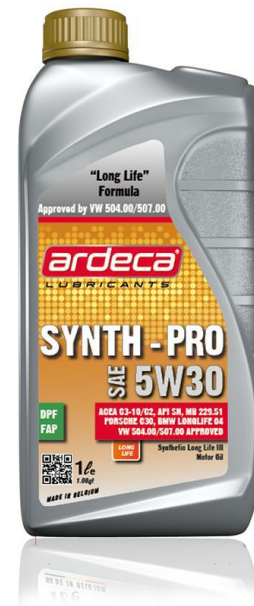

★ APPLICATIONS

Backwards compatible: 504.00 and 507.00 supersedes all previous VW specifications (502.00, 503.00, 503.01, 505.00, 506.00 and 506.01). All vehicles in the VAG Group (Volkswagen, Audi, Seat, Skoda) with extended oil drain intervals (30.000 km or 2 years) from 2007 onwards. Note: For V10 TDI and 5-cylinder 2.5 TDI engines, prior to 2007, where the 506.01 specification has to be used, this oil is not recommended. The first generation engines with pump injector units should use the 505.01 specification. Meets all engine protection requirements of ACEA C2.

★ APPROVALS

- VW 504.00/507.00

★ PERFORMANCE LEVEL

- ACEA C3-10
- ACEA C2
- API: SN
- VW 504.00/507.00
- MB 229.51
- PORSCHE C30
- BMW LONG-LIFE 04

★ FEATURES

Aftertreatment protection : full aftertreatment system protection.

Total engine protection : outstanding engine cleanliness and durability.

Fuel economy : lower fuel consumption and CO2 emissions.

★ CHARACTERISTICS

	unit	average value
Density at 15 °C	kg/l	0,851
Viscosity -30 °C	mPas	5950
Viscosity 40 °C	mm ² /s	69,20
Viscosity 100 °C	mm ² /s	12,00
Viscosity Index		171
Flash Point COC	°C	230
Pour Point	°C	-42
Total Base Number	mgKOH/g	6,7
Sulphate Ash	%	0,67

★ PACKAGING



12x1L



4x4L



3x5L



20L



60L



210L

30L

Vroman NV - Oudenaardestraat 49 | 8570 Vichte | Belgium

T +32 56 72 62 29 - F +32 56 72 67 37 - E info@ardeca-lubricants.be